



[Dream / 845S]

Dream / 845S



CPU

4 (478) /
1.5GHz ~ 2.40GHz

845

AGP 4X (1.5V)
FSB 400 MHz

Intel ICH2

AC '97 (ALC 201A)
Ultra DMA 33/66/100
ACPI

3 168 SDRAM [3GB]
3.3V SDRAM

CNR (Communication Network Riser) 1
32 PCI 6
AGP (Accelerated Graphics Port) 1 [AGP 4 1.5V 가]

On - Board IDE

UDMA 33/ 66/ 100 [2 IDE]
IDE HDD, CD-ROM, ZIP Drive 가
FDC 1 :1.2M, 1.44M 2

On - Board

2
1 (SPP/ EPP/ ECP)
1 IrDA ()
4 USB

Plug & Play


DMI()
가 : Floppy, LS120, HDD-0, SCSI, CDROM, HDD-1, HDD-2,
HDD-3, ZIP100, LAN

ATX - 30.5 cm X 20 cm



CPU

845S CPU 가 478 . 4/

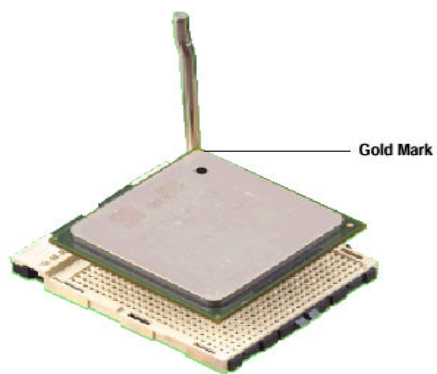

1, CPU


90
OPEN .



2, CPU


CPU
CPU
, CPU 가

CPU

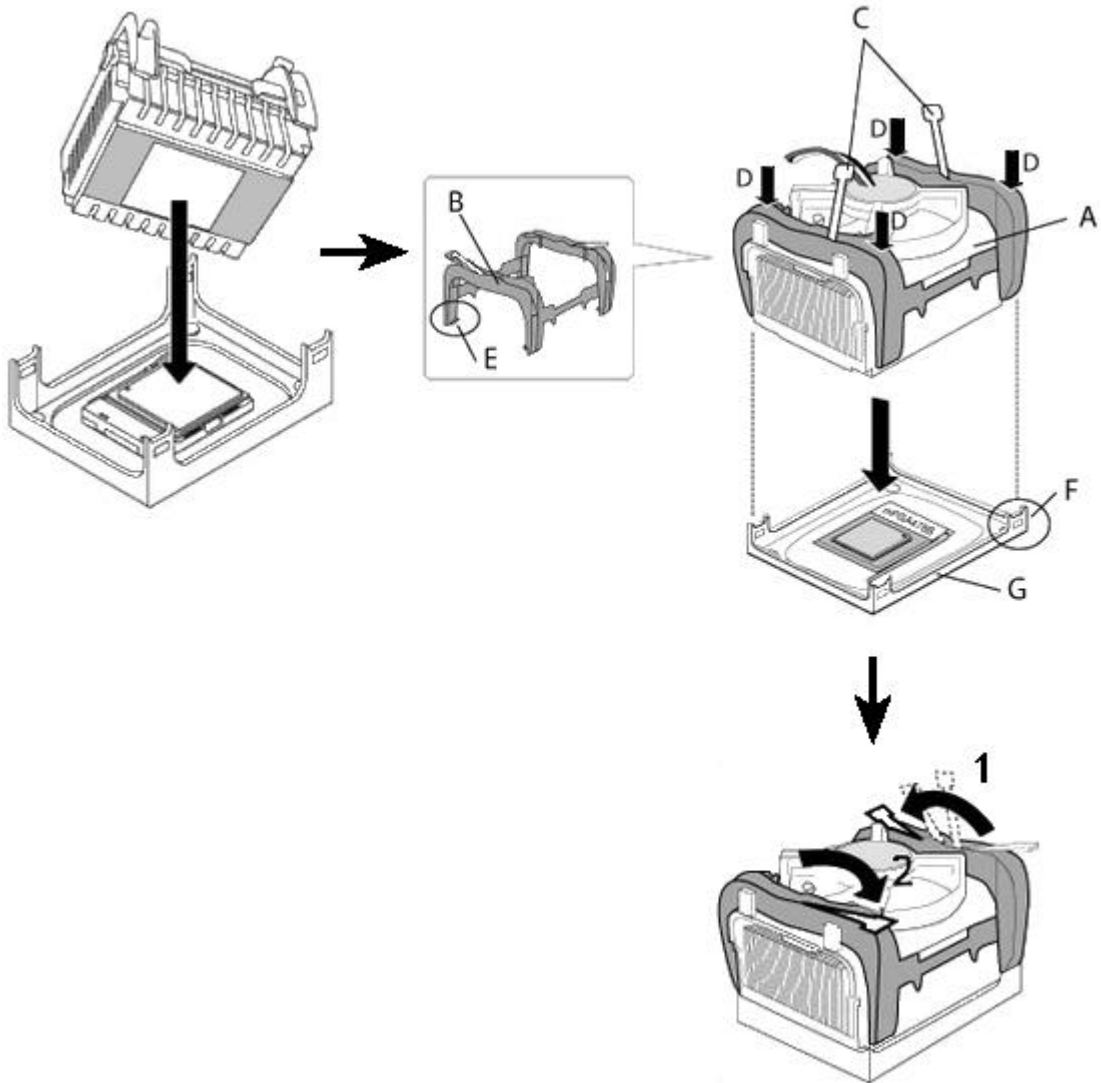


3, CPU

, E , CPU 가 4 .
...

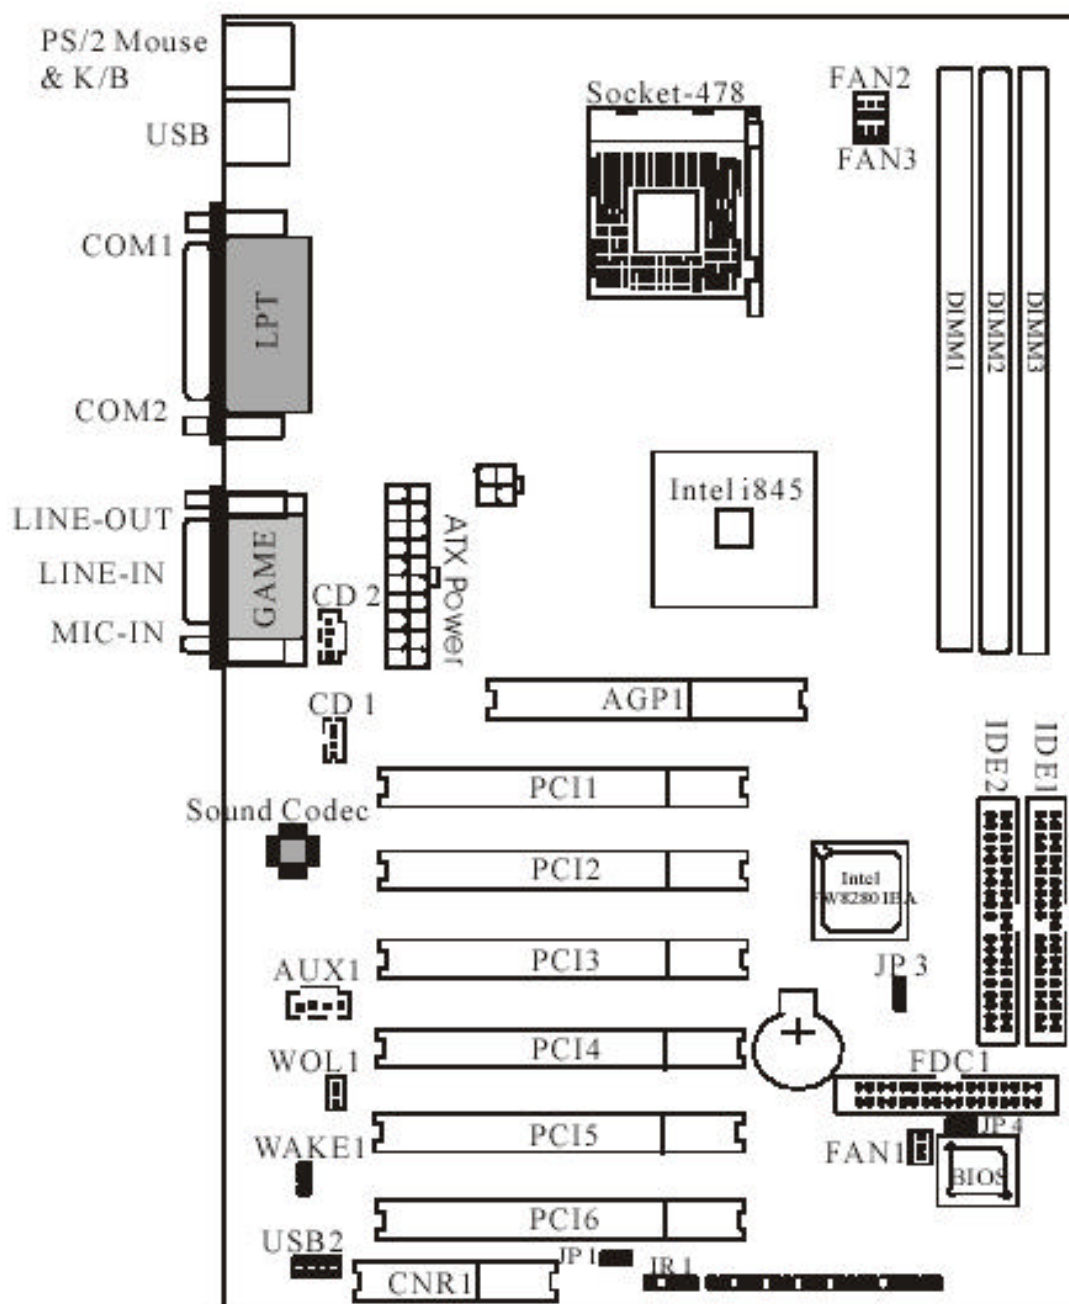




1,

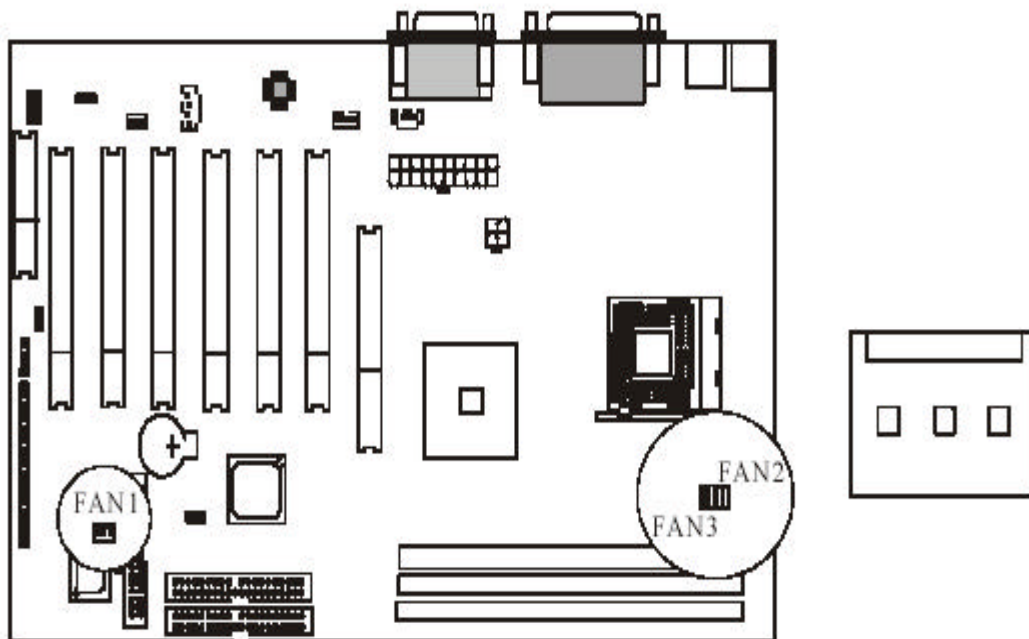


- CPU
 - FAN1 :
 - Fan2 : CPU

2,

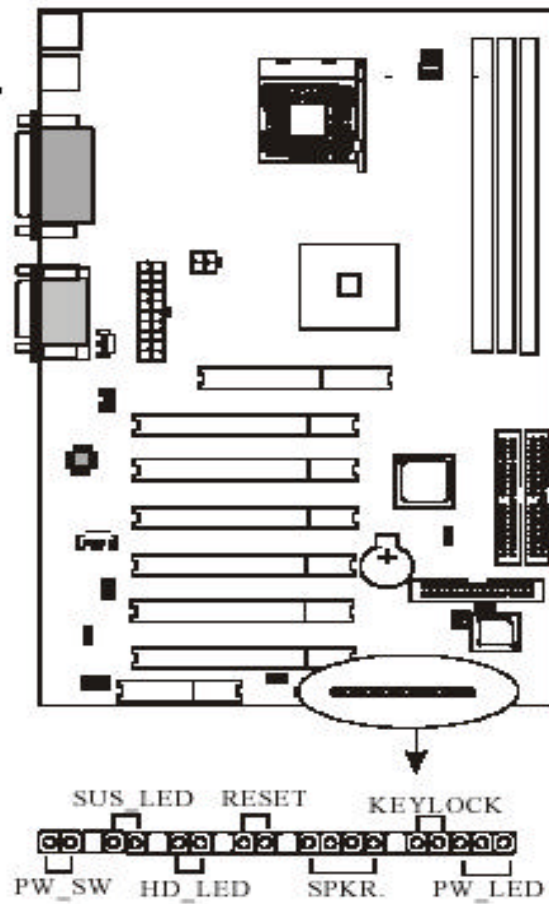


- PW_SW :
- SUS_LED : LED
- HD_LED : HDD LED
- RESET :
- SPKR :
- KEYLOCK :
- PW_LED : LED

3, 가 USB

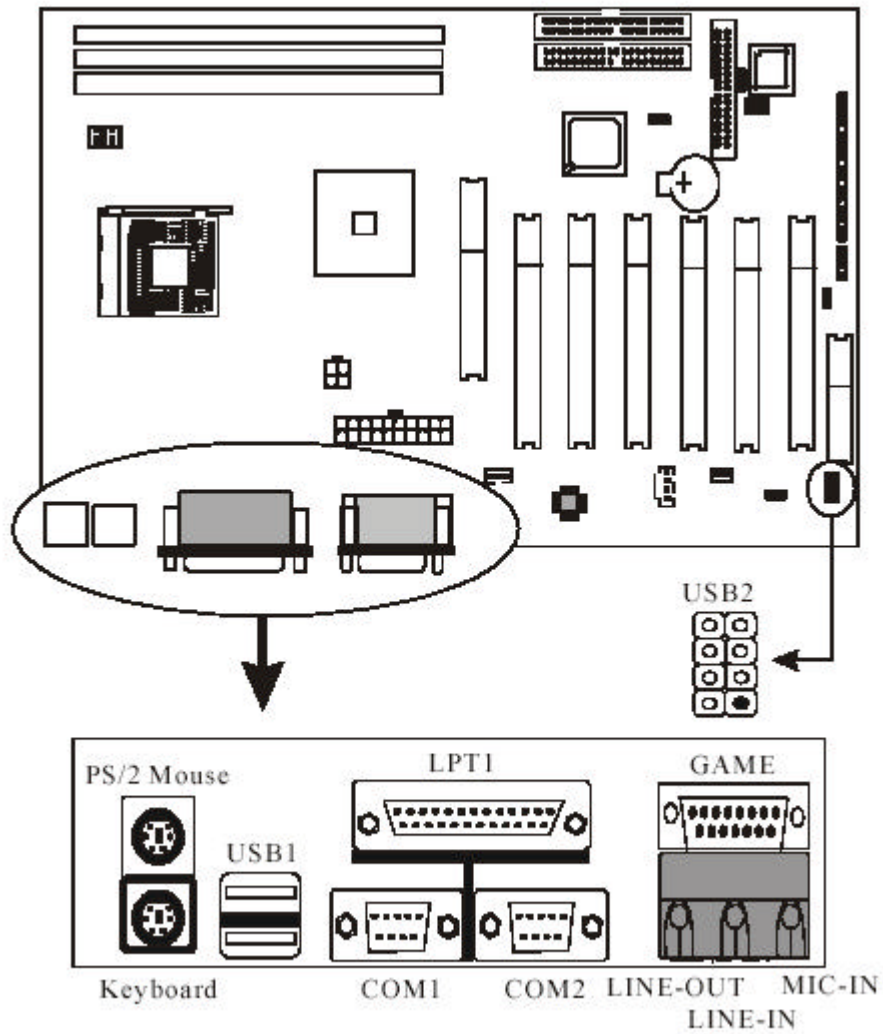


- PS/2 , – PS/2 ,
- USB1 – USB (2)
- – (EPP) (ECP)
- / –
- Line Out –
- Line In – CD ,
- Mic In –


4, USB

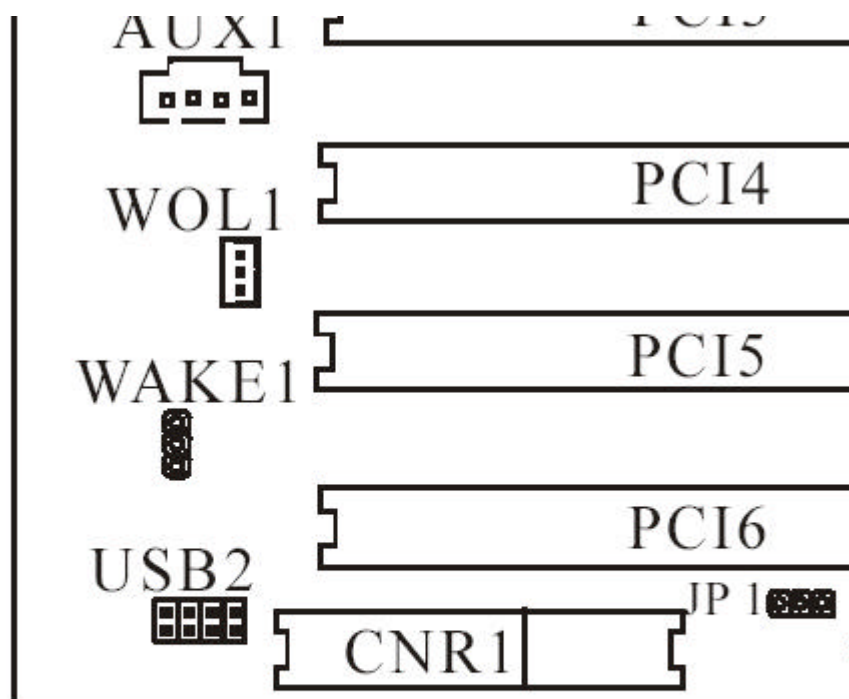

* USB2

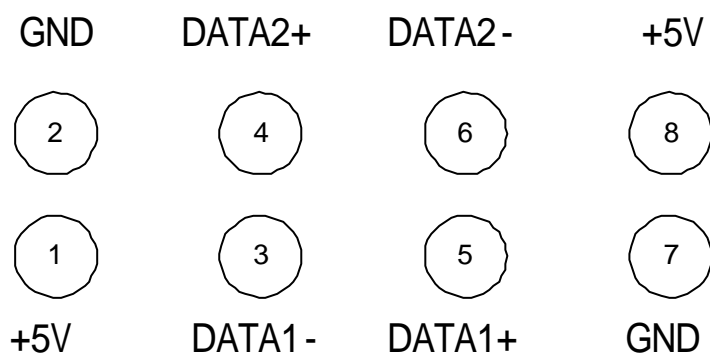


5, FDD

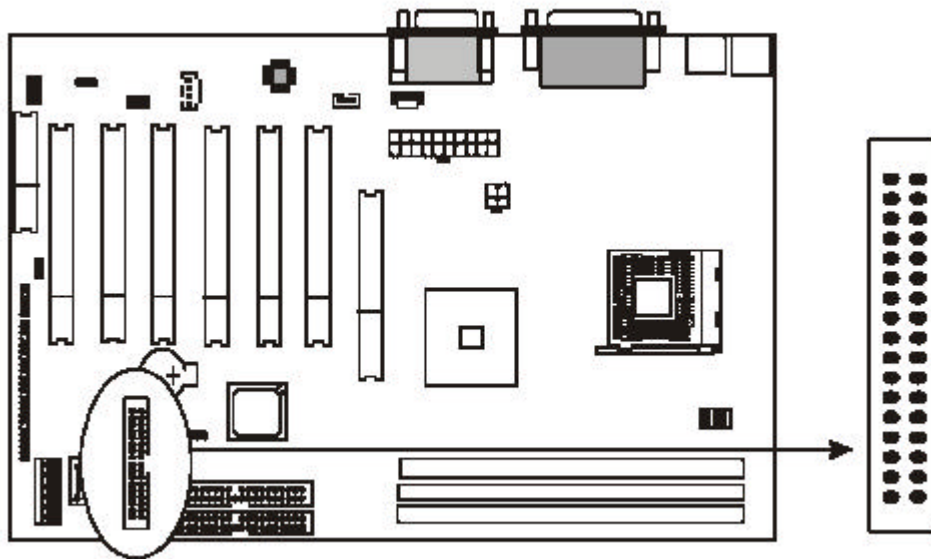


- FDC 1 : 1.2M, 1.44M 2

6, HDD

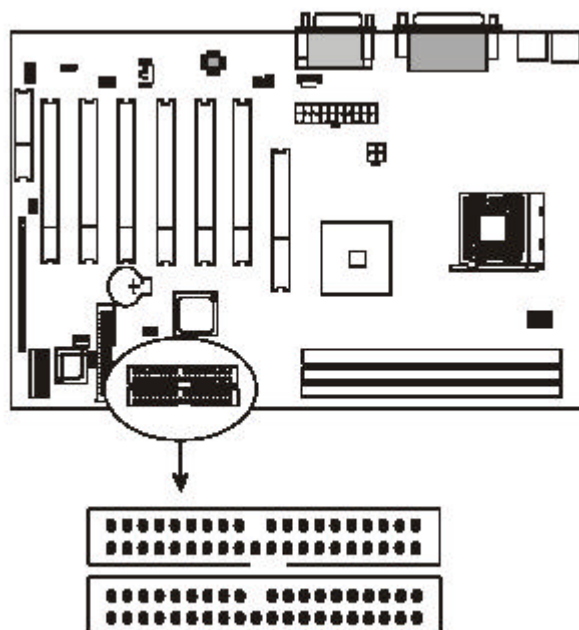


- UDMA 33/ 66/ 100 [2 IDE]
- IDE HDD, CD-ROM, ZIP Drive 가

7, CD-ROM

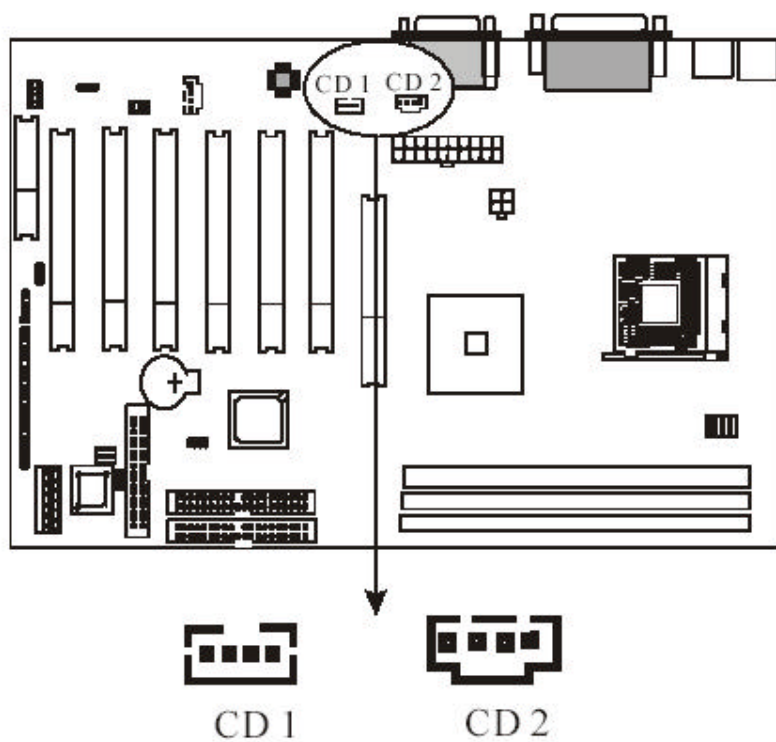


8,

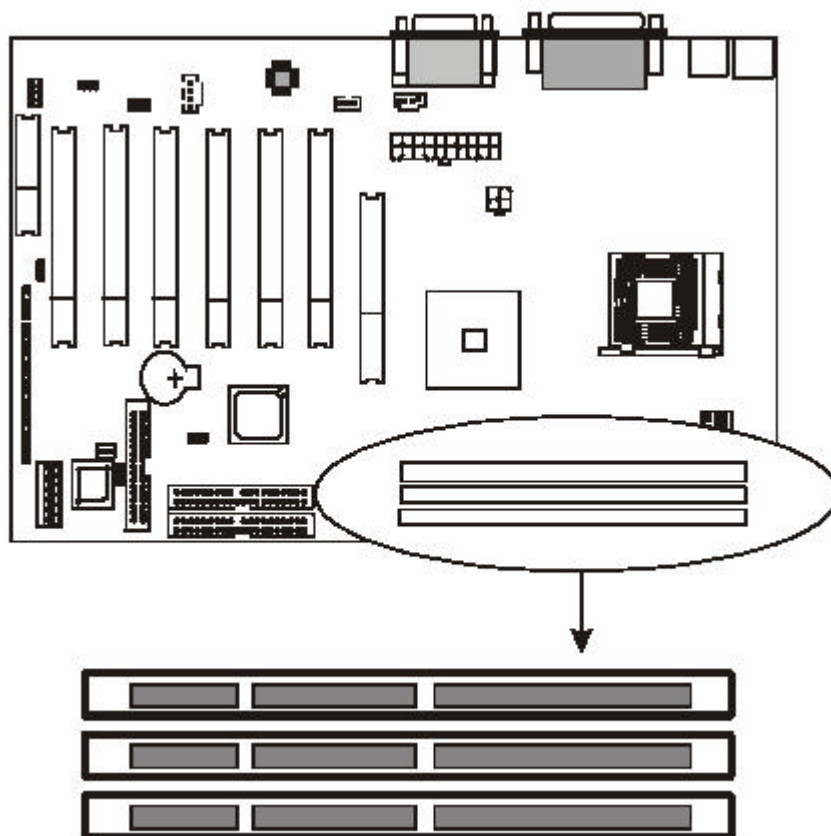



- 3 168 SDRAM [3GB]
- 3.3V SDRAM

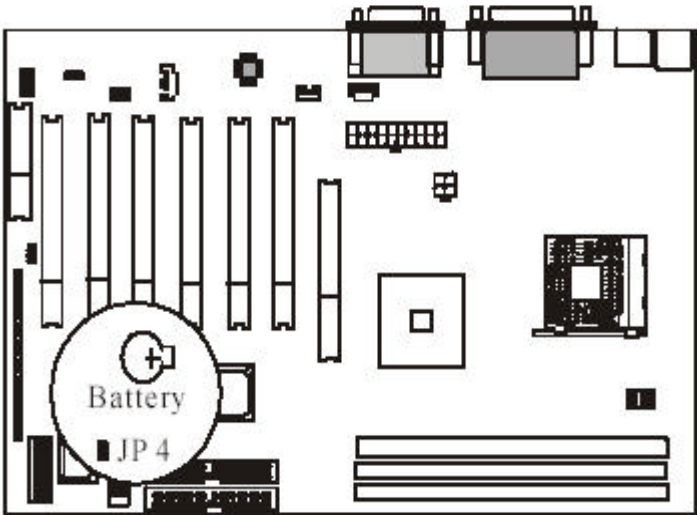9 ,CMOS



- .
- , .

CMOS Status

JP4	Retain CMOS settings	Clear CMOS Settings
CMOS		

- , JP4 1-2 2-3
- 2~3 1-2 .
- .